


TRIPOD TURNSTILE WR-262



BODY	External water protected body 1.2 mm 304 stainless steel
ARM	Can be disassembled and mounted individually 35x3 mm aluminum arm /Ops. Stainless steel
WEIGHT	~ 40 kg
INDICATORSE ENERGY	Orientation indicators are available as standard. 176-264 V 50 Hz AC/24V DC Standby ~15 W. max. ~60 W at Transition.
OPERATING TEMPERATURE	- 20 / + 60 °C
ACCESSORIES	Automatic Falling Arm/ Remote control transceiver unit/ Button Control Box/ Counter/ Card Reader/ Leakage Photocell
DIMENSIONS	300 x 850 x 970 mm

It is offered to our customers to create visual awareness with its impact resistant structure.

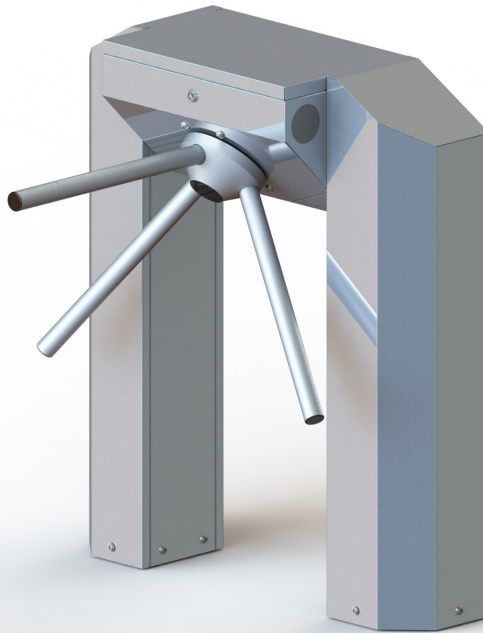